
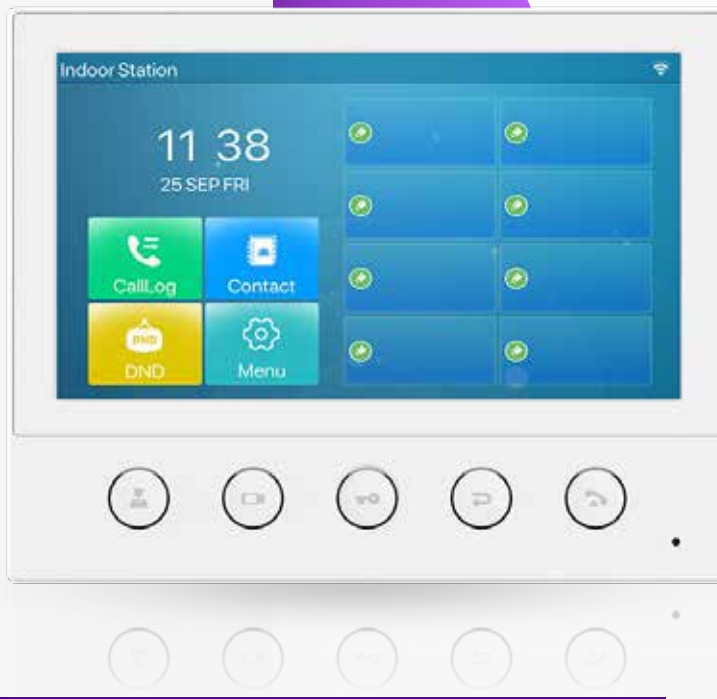


SIP

Indoor Station

I53W

Xtend i53W is an indoor station with 7-inch color touch screen and rich interfaces. It is mainly used in residential area, villa, office building and other places for receiving calling and communicating through the door phone and achieving remote door-opening.

It provides more reliable security assurance and the easier access control for the users, creating a safe and comfortable living environment.

Highlight

- Stylish and simple outlook which matches with different decorative styles
- 7-inch capacitive color touch screen
- HD voice speech quality with built-in 2W speaker and Acoustic Echo Canceller (AEC)
- Built-in 2.4G Wi-Fi
- Possess 8 alarm inputs and 1 RS485 interfaces
- View the authorized camera image over the video door phone
- Rich interfaces to meet the needs in different application scenarios
- Support online management and upgrade
- Compatible with major platforms: Asterisk, Broadsoft, 3CX, Metaswitch, Elastix, Avaya etc.

Specification

Generic

6 SIP Lines

HD Voice

PoE

External Power Supply(Optional)

Generic

1 x LCD: 7-inch 800x480 Color Touch Screen

Video

Hardware video decoding: H.264

Video call resolution: QVGA / CIF / VGA / 4CIF / 720P / 1080P

Deployment & Management

Auto-provisioning via FTP/TFTP/HTTP/HTTPS/DHCP OPT66/SIP PNP/TR-069

Web management portal

Web-based packet dump

Configuration export / import

Firmware upgrade

Syslog

Audio

Wideband ADC/DAC 16KHz sampling

Narrowband codec: G.711A/U, G.729AB, iLBC

Wideband codec: G.722, Opus

Full-duplex hands-free speakerphone with AEC

Voice Activity Detection (VAD) / Comfort Noise Generation (CNG) / Background Noise Estimation (BNE) / Noise Reduction (NR)

Packet Loss Concealment (PLC)

Dynamic Adaptive Jitter Buffer

DTMF: In-band, Out-of-Band – DTMF-Relay (RFC2833) / SIP INFO

VQM voice quality monitoring

Network

10/100 Mbps Ethernet

IP Mode:IPv4/IPv6/IPv4&IPv6

IP Configuration: Static / DHCP / PPPoE

VPN: L2TP / OpenVPN

QoS

RTCP-XR (RFC3611), VQ-RTCPXR(RFC6035)

Wi-Fi

Physical Specifications

5 Function keys (Management Center, Monitor, Unlock, Return/Hang up, Answer)

10 Pin Cable x1

4 Pin Cable x1

2 Pin Cable x1

Wall-mount Bracket x1

Screws Kit x1

RJ45 Interface x1

RS485 Interface x1

Alarm Input Interface x8

DC Power Input: 12V/1A

Power Consumption (PoE): 1.44W~4.76W

Power Consumption (Adapter): 1.25W~4.09W

Working Temperature: 0~45°C

Working Humidity: 10~90%

Color: White

Installation: Desktop (Need to purchase stand separately)
Wall-mounted

Device Dimensions: 176x104x26.5 mm

Gift Box Dimensions: 193x152x39 mm

Outer CTN Dimensions: (20 PCS) 413x220x322 mm