


# Smart PoE IVR

IA-4-36-D

4HDD 36CH  
4K H.265+

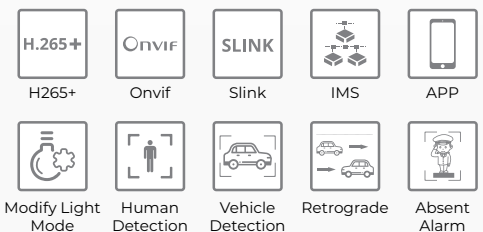

H.265+ 36CH IVR, support 36CH 4K IP camera input and output, support smart analysis IPC, 1 CH 4K/4CH 1080P/16 CH sub-code stream playback, 4 pcs HDD (max 10TB), 1CH VGA, 1 CH HDMI, support to upgrade IPC remote, modify IP camera address and light board mode, support alarm and audio, support RAID function.

## Highlight

- Support H.265+/H.265/H.264 dual stream decoding, 36CH 4K IP camera input
- Support synchronous recording, remote monitoring, backup; up to 16CH 1080P video synchronous playback and multi-channel backwards playback
- Support to upgrade IPC online and upgrade IPC through memory
- Support to modify my company IP address and light board mode
- Support to add IPC manually or automatically in LAN
- Support 30min instant playback, 30s pre-record
- Standard ONVIF, SLINK, RTSP protocol
- Support DDNS, EMAIL, UPNP, NTP, P2P and other functions
- Support WEB, mobile phone monitoring, client, IMS monitoring
- Support external alarm; Two-way audio intercom
- Support our Smart IPC: target count, electric fence, human detection, retrograde detection, absent alarm
- Support IPC centralized management, including IPC parameter configuration, information export and import, real-time information acquisition and upgrade, etc
- Support channel grouping, preview tour
- Supports disk grouping quotas and disk group storage modes, support RAID0, RAID1, RAID5, RAID6, RAID10...matrix style
- Support network HDD (IPSAN,NAS), double password authentication
- Support network monitoring: network traffic, network delay packet loss test, network packet capture backup
- Support multiple language, micro-intelligence, capture playback

## Specification

### Storage

HDD	4 SATA, max 10TB HDD
E-Sata	N/A

### Network

Network Interface	2*RJ45 10M/100M/1000M self-adaptive LAN port
Network Function	DDNS, EMAIL, UPNP, NTP, DHCP, IP Filter, PPPoE, P2P
Smart Phone	iPhone, android

### Video & Audio

Video Output	1 HDMI, 1 VGA
Audio Input & Output	1 RCA in, 1 RCA out, HDMI audio
Alarm Input & Output	4 in 4 out

### External Ports

USB	3 USB ports (2 USB2.0, 1USB3.0)
RS232	N/A
RS485	1

System	
Main Chipset	Hi3536C
Operating System	Embedded Linux
Bandwidth	216M
Video Format	H.265+/H.265/H.264
Video Resolution	4K/5MP/3MP/1080P/720P/D1
Smart Functions	Target count, electric fence, human detection, retrograde detection, absent alarm (need front end IPC supported)
Record Mode	Manual, Schedule, Motion Detection, Timing, Alarm, Stop
Playback	1CH 4K/4 CH 4K/9*3Mp/16CH 1080P
Backup Mode	USB Device/Network
Display mode	16ch Digital (4000X3000) + 16ch Preview + 16ch Playback 25ch Digital (4000X3000) + 25ch Preview + 16ch Playback 36ch Digital (4000X3000) + 36ch Preview + 16ch Playback

Human Detection								
Normal Mode		16 CH guard IPC or normal IPC						
Split	1	4	6	8	9	16		
Decode	4K	4K	4K+5*2mp	4K+7*2MP	2MP	1080P		
Normal Mode		25 CH guard IPC or normal IPC						
Split	1	4	6	8	9	16	25	
Decode	4K	4K	4K+5*2mp	4K+7*2MP	9*2MP	1080P	720P	
Normal Mode		36 CH guard IPC or normal IPC						
Split	1	4	6	8	9	16	25	36
Decode	5MP	4K	4K+5*2mp	4K+7*2mp	9*2mp	1080P	25*720p	36*D1

Others	
Power Supply	DC12V 6.25A
Power Consumption	≤25W (without HDD)
Dimension	Equipment: 440mm × 355mm × 70mm Packing: 560mm X 440mm X 135mm
Weight	5.5kg (without HDD) with package 6kg
Outside Carton	2pcs/Carton; Dimension: 570mm × 290mm × 490mm, 12.5kg

## Size

